



AIR CONDITIONING



REFRIGERATION



HEATING



mechanical



CONDENSATE REMOVAL PUMP

Bringing mini pump and peristaltic pump technology together. Simply position the remote reservoir (float switch) in the condensate tray or fix to the drain-pipe connection (depending on chosen reservoir). Alarm option available.



6.5L/h max. flow






12m max. head (flow rate 6.5L/h)

KEY FEATURES


- Float switch operated
- Remote install possible
- Submersible secondary reservoir included

SUITABILITY

- Up to 8.5kW / 29,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units



MECHANICAL SPECIFICATIONS	
Max. flow	6.5L/h @ 12m head
Max. head	12m
Max. suction lift	3m
Sound level@1m	47dB(A)
Power supply	230 VAC, 0.2A, 50/60Hz
Rated Class	Continuously I appliance
Max. unit output	8.5kW / 29,000Btu/h
Max. water temp	40°C / 104°F
Inlet/outlet	6mm ID
IP Protection	IP21
Safety switch	FP2078 n/a, FP2079 ✓
Thermal protection	✓
Fully potted	n/a
Self priming	✓

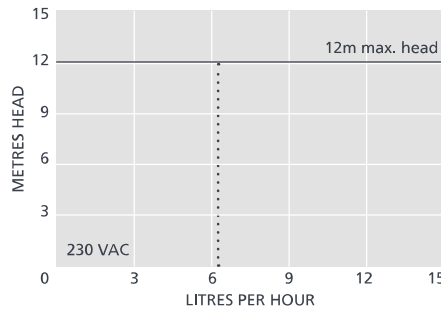

MECHANICAL OPTIONS	
Mechanical	FP2078
Mechanical with alarm	FP2079

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
Peri Spare Tube Kit		FP1282
1 Amp Fuse		FP2620
Tube To Soil Stack Adaptor		FP2038

Xtra For more installation accessories take a look at our Aspen Xtra range

IN THE BOX
Mechanical pump • 2m Plug & play power cable • Reservoir • Reservoir lid with 3m Float switch cable • Submersible reservoir • Wall mounted bracket • Fixing kit • Install manual

- Download manual at aspenspumps.com
- View install video at aspenspumps.com

Information correct at time of going to press.