



AIR CONDITIONING



REFRIGERATION



HEATING



mini orange[®]

CONDENSATE REMOVAL PUMP



The world's best selling mini pump offers unrivalled reliability and performance.



12L/h max. flow



10m max. rec. head (flow rate 6L/h)



21dB(A)

KEY FEATURES



- Submersible secondary reservoir included
- Plug & play
- Anti siphon device

SUITABILITY

- Up to 16kW / 54,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Smaller commercial & domestic units



0.25 kg†

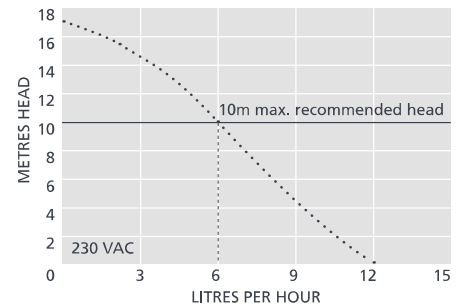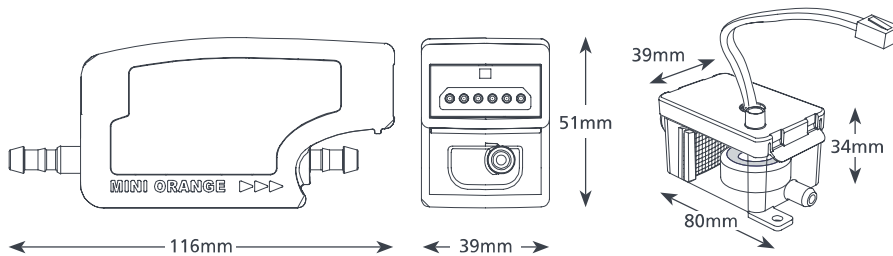

MINI ORANGE SPECIFICATIONS

Max. flow	12L/h @ 0 head
Max. rec. head	10m
Max. suction lift	2m
Sound level@1m	21dB(A)
Power supply	230 VAC, 0.11A, 16W, 50/60Hz
Rated Class	Non continuous II appliance <input type="checkbox"/>
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MINI ORANGE OPTIONS

Mini Orange (Europe)	FP2212
† Pump only	

IN THE BOX

- Mini Orange pump
- 1.5m Plug & play power cable
- Reservoir
- Reservoir lid with 1.5m sensor cable
- Submersible reservoir
- Anti siphon device
- Float & filter
- 1.5m Suction tube 6mm ID
- 220mm Orange inlet hose 14mm ID
- 150mm Vinyl breather tube 6mm ID
- Drain connector kit
- Fixing kit
- Install manual

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
4.3m Mini/Maxi orange extension kit	FP2940

- Download manual at aspenspumps.com
- View install video at aspenspumps.com

Xtra For more installation accessories take a look at our Aspen Xtra range

Information correct at time of going to press.



aspenspumps.com

+44 (0)1323 848842

sales@aspenspumps.com

reliable | silent | simple