

Performance

Ultra reliable - incorporates electronic level sensing with no moving parts

Whisper quiet - reliably removes condensate

Multi port - upto 6 condensate lines

Impact resistant - exceptionally high durability

Fit fast - floor or wall mounted



The MultiTank is favoured among architects and design consultants and is available for using with either MegaBlue™ or MaxiBlue™ pumps. The tank incorporates an energy efficient solid state level sensor which eliminates the use of moving floats - which often become stuck. By manifolding a number of fan coil units into the 1.5L MultiTank, it offers the installer complete flexibility surrounding any multi-unit installation.

MultiTank can prevent installation difficulties against centrifugal tank pumps which don't have the ability to run dry. By incorporating either the MaxiBlue™ or MegaBlue™ the user can prevent regular service call-outs to peristaltic tank units that have split tubes or worn gearboxes.

Tel: +44 (0)1932 355277
Email: info@charlesausten.com
Web: www.bluediamondpump.com

Manufactured by
Charles Austen
Pumps Ltd




Installation ideas


MaxiBlue™



MegaBlue™




Application ideas



MultiTank

connecting multiple lines into
one BlueDiamond™

Revolutionary Sensory Technology

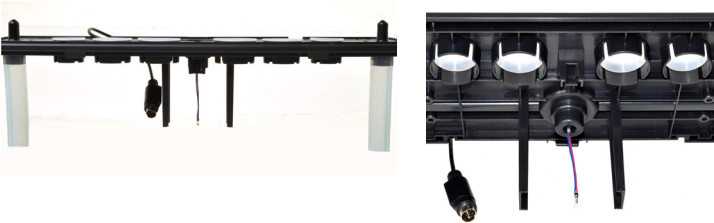

Thermistor Technology

With no moving parts the MultiTank offers a reliable alternative to stuck or sunken float switches. Incorporating our patented and proven thermistor technology the hi-low solid state level sensor only runs the pump when condensate is produced. With no moving parts to become clogged or stuck it is an ideal alternative to existing float switches.

Specifying MultiTank

Option 1

MaxiBlue™



Option 2

MegaBlue™




Option 1: MultiTank with MaxiBlue™ - 14 litres/hour
Designed for high lift applications (8m) the MultiTank and MaxiBlue™ make an ideal combination. Quiet enough for ceiling mounting and powerful enough for remote location makes a wide variety of installation possibilities a lot faster and simpler.

Option 2: MultiTank with MegaBlue™ - 50 litres/hour
Offering exceptional performance the MegaBlue™ can remove condensate far away and fast. With a head of 20m (6 storeys!) the MultiTank with MegaBlue™ can be used as a remote central collection point for condensate drainage.

SAFETY WARNINGS

- Always ensure that the MultiTank is secured and cannot be knocked over.
- It is essential that MultiTank is installed level
- Temperature range 0-40 C
- Integral fail safe alarm.
- Alarm shuts AC off in fault mode, restarts when clear

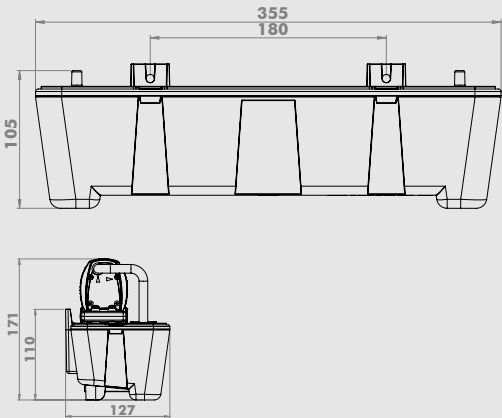

MultiTank - Connecting multiple lines into one BlueDiamond™

S30-271/1

